




Go Long. Gracefully. Greater Than Ever.

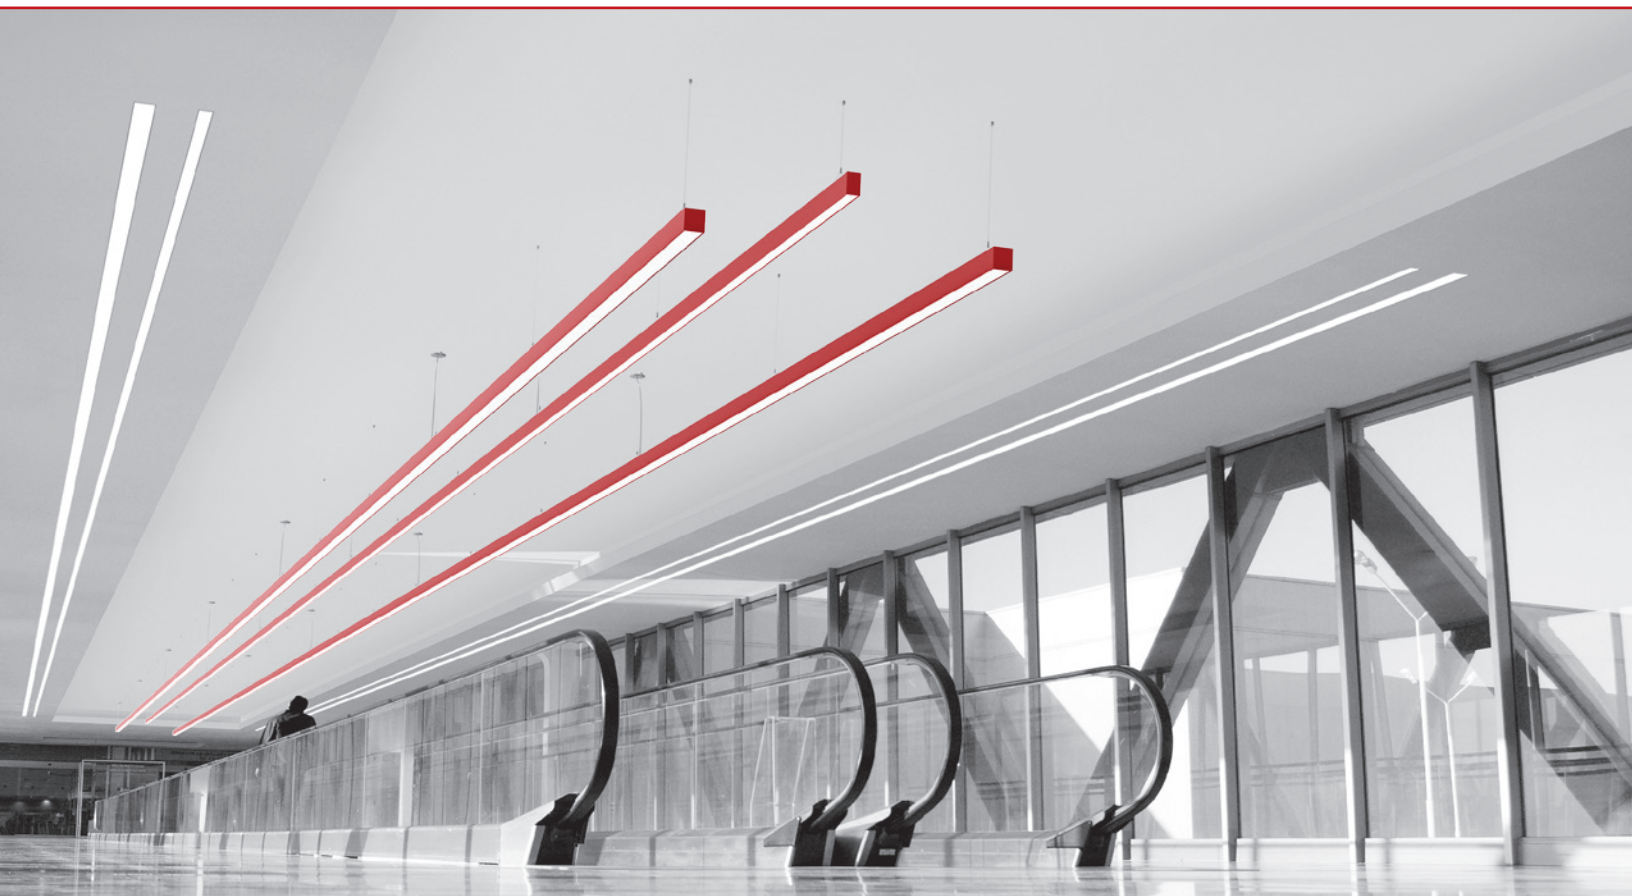

Seamless Illumination
Standout Performance
Smart Advances

SuperPlane[™]
with ControlRoll[™] Optics



alwusa.com/superplane


Rollout Begins January 2018

Span Grand Distances and Soar Gloriously Across the Great Indoors

Faster shipping. More powerful performance. Able to seamlessly span long distances with a single lens.

Look up to the ceiling. It's the next generation of Lightplane reinvented from the inside out.

It's SuperPlane, our new linear family of slot, suspended and surface luminaires designed to heroically illuminate interiors everywhere.

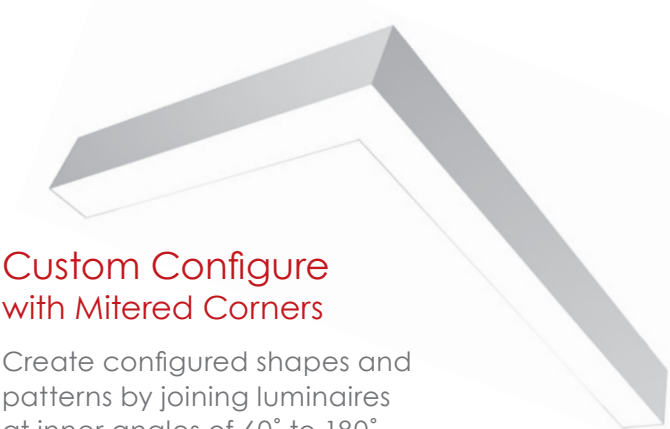

Custom Configure with Mitered Corners

Create configured shapes and patterns by joining luminaires at inner angles of 60° to 180°.

© 2017/2018 Architectural Lighting Works. All rights reserved.



Get 10-day-or-less shipping on eligible configurations – all models, all mountings including specs with Enlighted sensors and 90° mitered corners.

CompleteSuite™ Color LED Lamping Options


Select from Tunable White; 3000K, 3500K or 4000K CCT; RGB and RGB+White. 80+ CRI standard, 90+ CRI optional.




SuperPlane™ 2s



SuperPlane™ 4

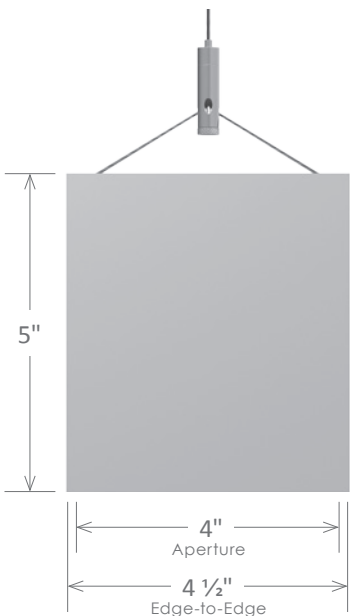

Edge-to-edge and height dimensions for suspended and surface models. Recessed slot models vary per install type. Aperture width consistent across all models.

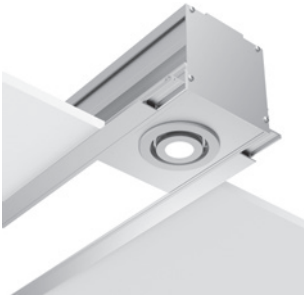

Integral Downlights



Provide ambient and directional accent illumination in a single channel with optional, aimable downlights that deliver up to 1500 lumens with a beam spread of 25° or 40°.



Integral Sensors

Specify an optional, occupancy detection and/or daylight harvesting sensor. Or upgrade to an Enlighted Smart Sensor with additional capabilities.

Choose direct, indirect or direct/indirect distribution. An optional, batwing uplight distribution allows for increased fixture spacing, in turn, reducing fixture costs and lowering energy consumption.

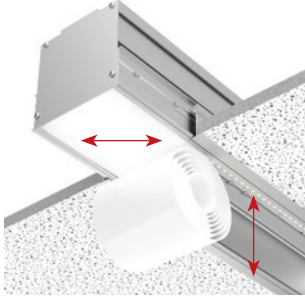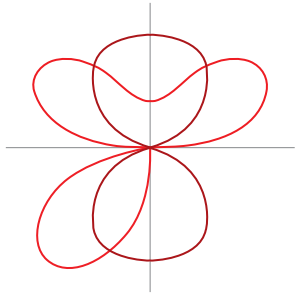

ControlRoll lens rolls out and snaps into channel for easy install. LED board and driver are removable as one unit for easy maintenance.

ControlRoll™ Optics


Seamless Illumination with Continuous Lens Up to 250'

Extend light further, flawlessly. The optically engineered, ControlRoll lens provides smooth, uniform and completely seamless illumination while dynamically controlling output to deliver either ambient direct lighting or asymmetric illumination for wall washing.




Reduce power use with an energy-efficient LED light engine available in customizable lumen packages up to 1200 lm/ft and specifiable dimming down to 0%.

OUTPUT OPTIONS WITH
EFFICACY
>105 LM/W

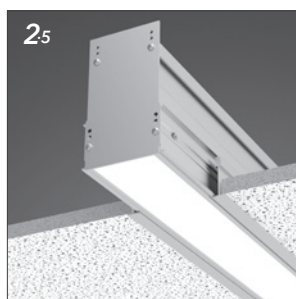


GRID SYSTEM
FLUSH

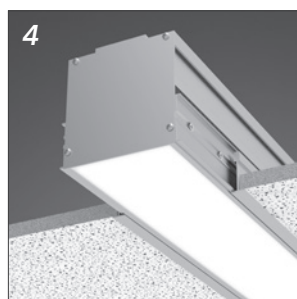


STANDARD & TECHZONE
T-GRID: 9/16" & 15/16" / SLOT: 9/16"




PERIMETER




ALL CEILINGS
FLUSH & REGRESSED



GRID SYSTEM
REGRESSED




STANDARD & TECHZONE
T-GRID: 9/16" & 15/16" / SLOT: 9/16"




SUSPENDED




ALL CEILINGS
PENDANT




MUD-IN




TRIMLESS FOR DRYWALL
FLUSH & REGRESSED




SURFACE




TOP-SIDE MOUNT FOR ALL CEILINGS
FRONT-FACING MOUNT FOR ALL WALLS




TRIMMED




WOOD, METAL, DRYWALL & MORE
FLUSH & REGRESSED



WALL



SIDE MOUNT
ADA-COMPLIANT



AVAILABLE IN
2.5 ONLY